

010 - 095 SERIES




010-095							
KR	140	170	200	260	290	320	
LB	820	914	1008	1197	1291	1385	
UB	490	520	550	610	640	670	
H	348	408	468	588	648	708	
P	h	F	Dmax	dmax	ST	S	Q
95	68	125	47	43/38	4	9,5	10

Cable carrier length:

$$L_K \approx \frac{L_S}{2} + L_B \quad \text{Multiple of 95mm}$$

Cable carrier proper weight x M = Kg. 7.5
 Number of steps x M = 10.53
 F mobile locking height = H + 34 mm.

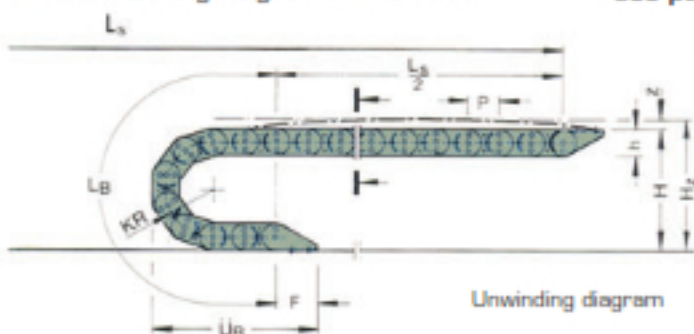

Installation dimensions:

$$H_2 = H + z \quad z \approx 10 \text{ mm/m cable carrier length}$$


For self-bearing capacity, see page 43
 Profile and divider technical data
 see pages 39 - 44

Type of cover
 see page 54


Flange position variants
 see page 45

Assembly position variants
 see page 40

STANDARD LOCKING FLANGES

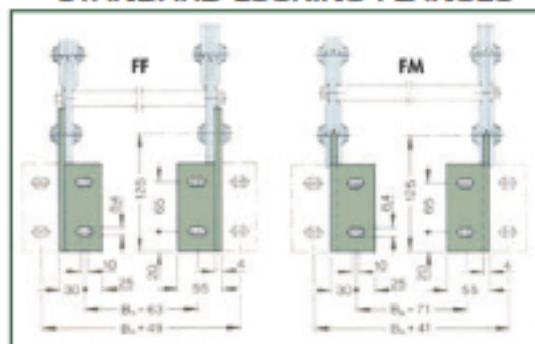

GUIDE CHANNEL

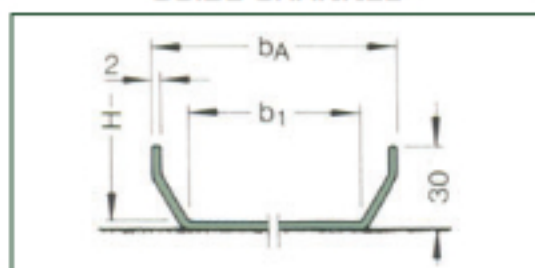

$$b_1 = B_K + 15 \text{ mm} \quad b_A = B_K + 40 \text{ mm}$$

TYPES OF CROSS-LINKS AVAILABLE FOR THIS MODEL

