

010 - 125 SERIES

010-125							
KR	145	220	260	300	340	380	
LB	955	1191	1317	1442	1568	1694	
UB	597	672	712	752	792	832	
H	384	534	614	694	774	854	
P	h	F	Dmax	dmax	ST	S	Q
125	94	155	73	67/60	5	11	10



Cable carrier length:


$$L_K \approx \frac{L_S}{2} + L_B \quad \text{Multiple of 125 mm}$$

Cable carrier proper weight x M = Kg. 12,5
 Number of steps x M = B
 F mobile locking height = H + 47mm.

Installation dimensions:

$$H_Z = H + Z \quad z = 10 \text{ mm/m cable carrier length}$$

For self-bearing capacity, see page 43
 Profile and divider technical data, see pages 39 - 44

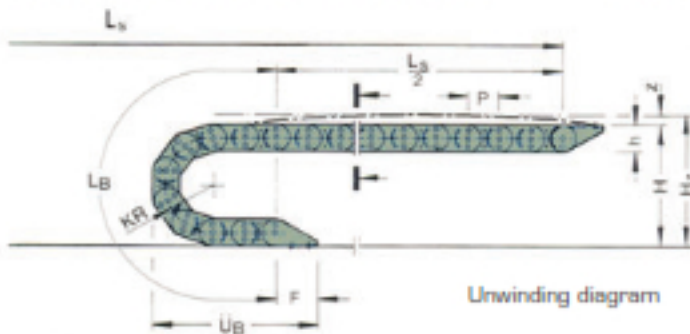


Type of cover
 see page 54


Flange position variants
 see page 45

Assembly position variants
 see page 40

STANDARD LOCKING FLANGES

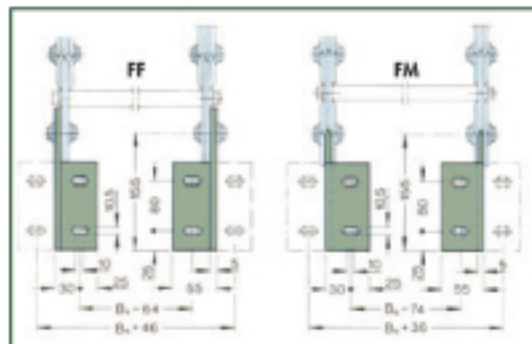

GUIDE CHANNEL

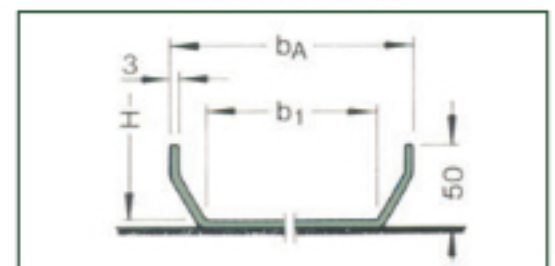

$$b_1 = B_K + 20 \text{ mm} \quad b_A = B_K + 60 \text{ mm}$$

TYPES OF CROSS-LINKS AVAILABLE FOR THIS MODEL

